

V3.0

X-Treme Series

AUTO DRY CABINETS

NEW



NEW DISPLAY & VERSION 3.0 SOFTWARE


NOW, ALL X-TREME SERIES AUTO DRY CABINETS COME with VERSION 3.0 EMBEDDED SOFTWARE AS A STANDARD

User friendly in-house software is specifically coded for X-Treme Series Auto Dry Cabinets.

The system works integrately with embedded software that offers real-time monitoring, remote monitoring and data logging for single or multiple cabinets.

X-Treme Series is the best place for your product.

WHAT'S COMING IN THIS MAJOR UPGRADE?

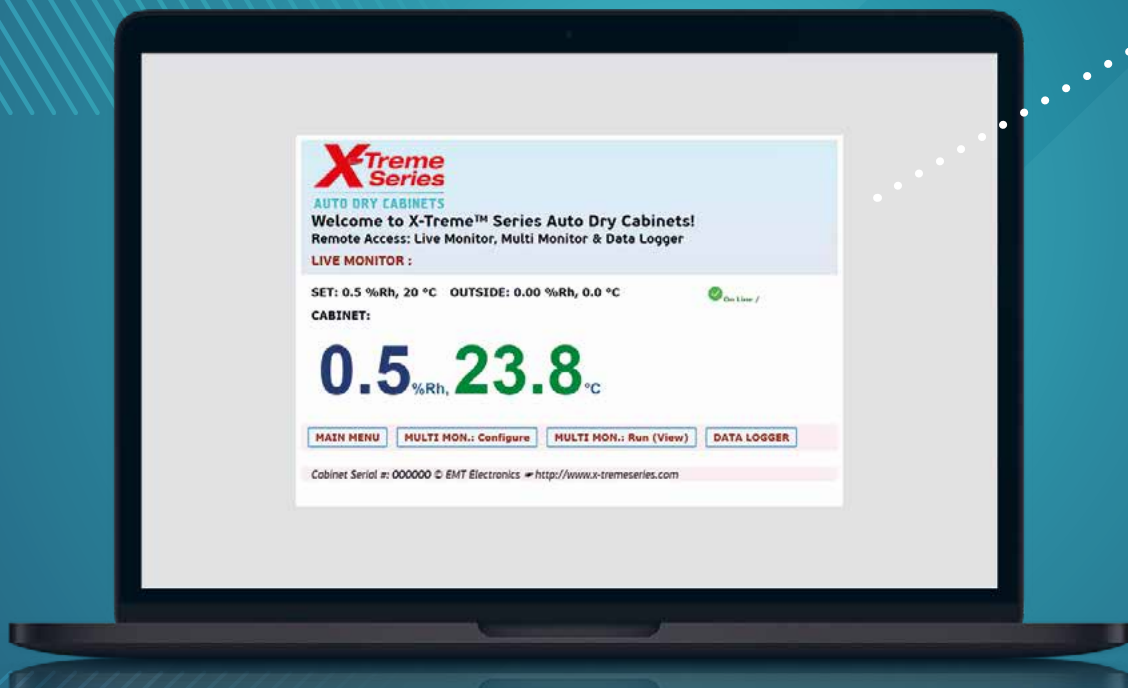



*7" (155 x 86mm) Touch Screen Control Panel
with 800*480 Pixel Screen Resolution*



Remote Monitoring System (RMS)



Internet Connection by Wi-Fi and Ethernet Cable



Datalogger (2GB) with

- *Wi-Fi (Wireless)*
- *Ethernet Cable (Network)*
- *USB Flash Disk Connection*



*Easy to integrate into in-house
Enterprise Resource Planning (ERP) systems*



Real-time clock (RTC)



RFID Access Control System

Comparison of Version 2.0 *v.s.* Version 3.0


| | <i>Version 2.0</i> | <i>Version 3.0</i> |
|--------------------------------|---|--|
| Datalogger Capacity | Limited (4 mb) data logging capacity (up to 89 days) | 2 GB data logging capacity (up to 10 years) |
| Datalogger Connection | Only with USB Cable and requires an X-Treme Datalogger Software | Wi-Fi, Ethernet Cable (Network), USB Flash Disk, No Software requirement |
| Display / Control Panel | 240 *128 Graphic, monochrome, LCD Touch Screen Control Panel | 7" Touch Screen , Colourful Control Panel, 800*480 Pixel Screen Control Panel |
| Touch Screen Type | Resistive | Capacitive |
| Active Screen Area | 107,98 x 57,58 mm | 155,00 x 86,00 mm (7") |
| Cabinet Data Access | Only from Cabinet Screen | Via PC, Phone, Tablet, Cabinet Screen |
| User Access Option | Access Code Used as Password | RFID cards and Access Code Used as Password |
| Alarm Notifications | Internal Buzzer and External Alarm Bar | Via e-Mail, Internal Buzzer and External Alarm Bar |
| System Integration | Not available | ERP, SAP etc. Software Integration Option |
| Door Lock Type | Solenoid Door Locks | Automatic Door Locks (Gear System) |

Easy access to your cabinets' parameters from anywhere by phone, PC, tablet with an IP address via internet browser.




Remote Monitoring System (RMS) provides you flexibility to check and monitor humidity & temperature from outside.

Notifications via e-mails to users when the set parameters exceeded.

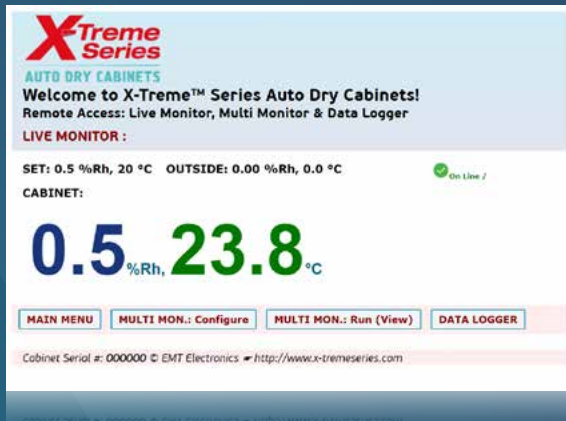

Data management of multiple drying cabinets. The data of all devices can be viewed from a single page up to 10 cabinets.

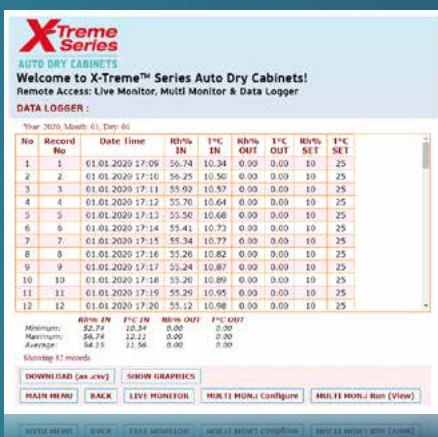

Datalogger parameters can be exported to your computer by internet connection for more detailed analysis.



Monochrome, resistive touch screen control panel



7" Colourful, user friendly, windows-based capacitive touch screen control panel

X-Treme Series

AUTO DRY CABINETS

The Fastest Dry Cabinets for Drying & Baking Electronic Components

Manufactured by EMT Electronics


Çamlıca Mahallesi, Anadolu Bulvarı No:16

Regnum Ticaret Merkezi, B Blok No: 5/1

06200 Yenimahalle ANKARA - TURKEY

T: +90 312 472 20 60 F: +90 312 472 20 65

info@x-tremeseries.com www.x-tremeseries.com



Compliance with IPC/JEDEC-J-STD-033D standards
Compliance with CE and Rohs