



HANPU

HANPU ELECTRIC WRENCH CATALOGUE

>> >>>

SHANDONG HANPU MACHINERY INDUSTRIAL CO.,LTD.

Address: High-tech zone, Cide, Shandong Province, China
ROOM 1812, BUILDING A, WANDA PLAZA, NO.8 JINGSHI ROAD,
JINAN CITY, SHANDONG PROVINCE, CHINA

Tel: 86-531-83530747/0061/0114/ 88880114

Tel: 86-531- 88619166/83530737

Fax: 86-531-83530747

Web: www.hanputool.com

www.hpanpuwrench.com

E-mail: jinanhanpu@126.com

jinanhanpu@aliyun.com

Zip Code : 250001



Note: Specifications The Company retains the power to modify, catalog product shape for reference only, please reality in hand.

BRIEF INTRODUCTION

Shandong HANPU Machinery Industrial Co., Ltd was founded in 2005 and located in High-tech zone, Qihe Shandong Province, China. We pride ourselves on our ability to meet the most challenging technical, quality and logistical demand of our clients.

We have administration department, production department, financial department, sales department and a skillful research team, perfect service system and internationalization analysis system.

We will provide high quality products and good services. We strive to meet your demands in with inexpensive and modest products. Contact us for how we can supply and assist you.



ELECTRIC SHEAR
WRENCH

01 / 02




ELECTRIC SHEAR
WRENCH -LW SERIES




CHARACTERISTICS

Light weight, smallest volume on same level shear wrench.
Adapt well to narrow space, comfortable to operate.



ELECTRIC SHEAR WRENCH -LW SERIES **S-20LW**

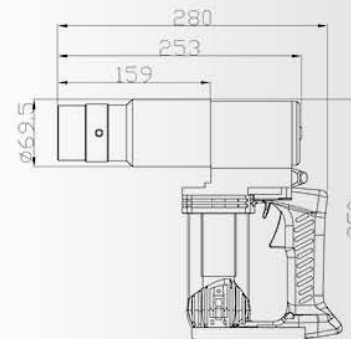

ELECTRIC SHEAR WRENCH -LW SERIES **S-24LW**

| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | MAX. TORQUE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|--------|---------|---------|-------------|-----------------------|-------------|------------------|--------------------|-------------------|---------------------|------|------|
| | | | | | | | | | S-10T | A325 | A490 |
| S-20LW | 50-60Hz | 230V | 8A | 1800W | 640N.m | 28rpm | 4.9KG | Double Insulation | M12 | 1/2" | 5/8" |
| | | 115V | 16A | | | | | | M16 | 5/8" | 3/4" |
| | | | | | | | | | M20 | 3/4" | |
| S-24LW | 50-60Hz | 230V | 8A | 1800W | 1200N.m | 15rpm | 5.5KG | Double Insulation | M16 | 5/8" | 5/8" |
| | | 115V | 16A | | | | | | M20 | 3/4" | 3/4" |
| | | | | | | | | | M22 | 7/8" | 7/8" |
| | | | | | | | | | M24 | 1" | |


Each wrench provide 2 sockets, one of them will be set on the wrench.

02


ELECTRIC SHEAR
WRENCH -LP SERIES

CHARACTERISTICS


Light weight, smallest volume on same level shear wrench.
High strength, can tight higher strength bolt, like A490.



ELECTRIC SHEAR WRENCH -LP SERIES S-22LP



ELECTRIC SHEAR WRENCH -LP SERIES S-24LP



ELECTRIC SHEAR WRENCH -LP SERIES S-30LP

| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | MAX. TORQUE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|--------|---------|--------------|-------------|-----------------------|-------------|------------------|--------------------|----------------------|---------------------|--------|--------|
| | | | | | | | | | S-10T | A325 | A490 |
| S-22LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 900N.m | 20rpm | 5KG | Double Insulation | M16 | 5/8" | 5/8" |
| | | | | | | | | | M20 | 3/4" | 3/4" |
| | | | | | | | | | M22 | 7/8" | 7/8" |
| S-24LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 1200N.m | 9rpm | 5.5KG | Double Insulation | M16 | 5/8" | 5/8" |
| | | | | | | | | | M20 | 3/4" | 3/4" |
| | | | | | | | | | M22 | 7/8" | 7/8" |
| S-30LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 2100N.m | 8rpm | 6.6KG | Double Insulation | M24 | 1" | 1" |
| | | | | | | | | | M27 | 1-1/8" | 1-1/8" |
| | | | | | | | | | M30 | 1-1/4" | 1-1/8" |

Each wrench provide 2 sockets, one of them will be set on the wrench.

>> > >>> WWW.HANPUTOOL.COM


03

ELECTRIC SHEAR
WRENCH -EP SERIES


汉普
HANPU

CHARACTERISTICS

High strength, suitable for super high strength bolt tightening.
High efficient, fast rotate speed, high torsion

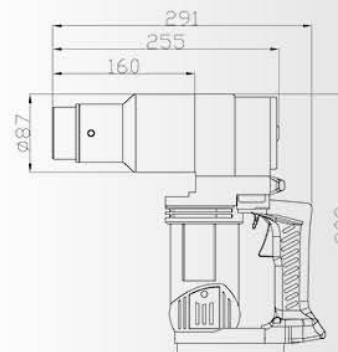

ELECTRIC SHEAR WRENCH -EP SERIES S-24EP

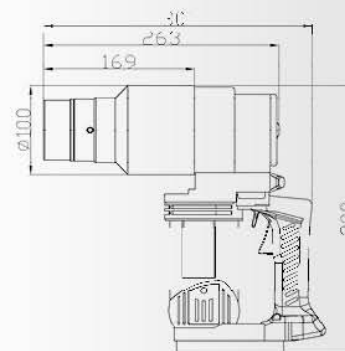


ELECTRIC SHEAR WRENCH -EP SERIES S-27EP

| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | MAX. TORQUE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|--------|---------|--------------|-------------|-----------------------|-------------|------------------|--------------------|----------------------|---------------------|--------|------|
| | | | | | | | | | S-10T | A325 | A490 |
| S-24EP | 50-60Hz | 230V 115V | 10A 20A | 2200W | 1200N.m | 19rpm | 7.2KG | Double Insulation | M16 | 5/8" | 5/8" |
| | | | | | | | | | M20 | 3/4" | 3/4" |
| | | | | | | | | | M22 | 7/8" | 7/8" |
| | | | | | | | | | M24 | 1" | 1" |
| S-27EP | 50-60Hz | 230V 115V | 10A 20A | 2200W | 1700N.m | 17rpm | 8.1KG | Double Insulation | M16 | 5/8" | 5/8" |
| | | | | | | | | | M20 | 3/4" | 3/4" |
| | | | | | | | | | M22 | 7/8" | 7/8" |
| | | | | | | | | | M24 | 1" | 1" |
| | | | | | | | | M27 | 1-1/8" | 1-1/8" | |


Each wrench provide 2 sockets, one of them will be set on the wrench.

04

ELECTRIC SHEAR
WRENCH

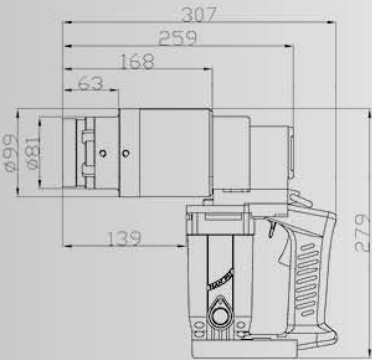

ELECTRIC SHEAR WRENCH **S-30G**

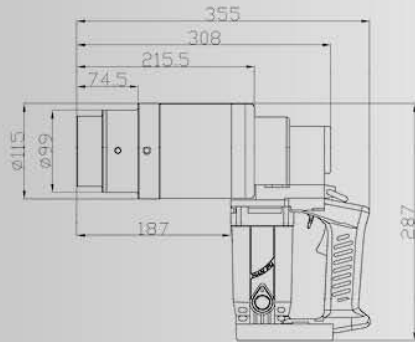

ELECTRIC SHEAR WRENCH **S-36G**

| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | MAX. TORQUE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | PROTECT CLASS | ADAPTABLE BOLTS DIA | |
|-------|---------|--------------|-------------|-----------------------|-------------|------------------|--------------------|-------------------|---------------------|----------------------------|
| | | | | | | | | | S-10T | A325 |
| S-30G | 50-60Hz | 230V 115V | 12A 24A | 2800W | 2500N.m | 5rpm | 8.7KG | Double Insulation | M24 M27 M30 | 1" 1-1/8" 1-1/4" |
| S-36G | 50-60Hz | 230V 115V | 12A 24A | 2800W | 3500N.m | 2.5rpm | 12.5KG | Double Insulation | M30 M33 M36 | 1-1/4" 1-3/8" 1-1/2" |

Each wrench provide 2 sockets,one of them will be set on the wrench.

>> > >>> WWW.HANPUTOOL.COM


05

INDEXABLE ELECTRIC
SHEAR WRENCH




CHARACTERISTICS

Can rotate 4 different angles, easily adapt to special space.



INDEXABLE ELECTRIC SHEAR WRENCH **SR-22LP**



INDEXABLE ELECTRIC SHEAR WRENCH **SR-24LW**

ROTATE ANGLES



| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | MAX. TORQUE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | PROTECT CLASS | ADAPTABLE BOLTS DIA | |
|---------|---------|--------------|-------------|-----------------------|-------------|------------------|--------------------|-------------------|--------------------------|----------------------------|
| | | | | | | | | | S-10T | A325 |
| SR-22LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 900N.m | 20rpm | 5.6KG | Double Insulation | M18 M20 M22 | 5/8" 3/4" 7/8" |
| SR-24LW | 50-60Hz | 230V 115V | 8A 16A | 1800W | 1200N.m | 15rpm | 6.1KG | Double Insulation | M18 M20 M22 M24 | 5/8" 3/4" 7/8" 1" |

Each wrench provide 2 sockets,one of them will be set on the wrench.



CORNER TYPE ELECTRIC SHEAR WRENCH

CHARACTERISTICS


Special corner design, perfect for narrow space work.



CORNER TYPE ELECTRIC SHEAR WRENCH **SC-24B**

| MODEL | SC-24B | | | |
|-----------------------|-----------|------|------|---------|
| VOLTAGE | 230V/115V | | | |
| MAX CURRENT | 10A/20A | | | |
| MAX POWER CONSUMPTION | 2200W | | | |
| FREQUENCY | 50-60HZ | | | |
| MAX.TORQUE | 900N.m | | | |
| RO SPEED (min-1) | 8rpm | | | |
| WEIGHT (MAIN BODY) | 8KG | | | |
| ADAPTABLE BOLTS DIA | S-10T | M16 | M20 | M22 M24 |
| | A325 | 5/8" | 3/4" | 7/8" 1" |

Each wrench provide 2 sockets,one of them will be set on the wrench.

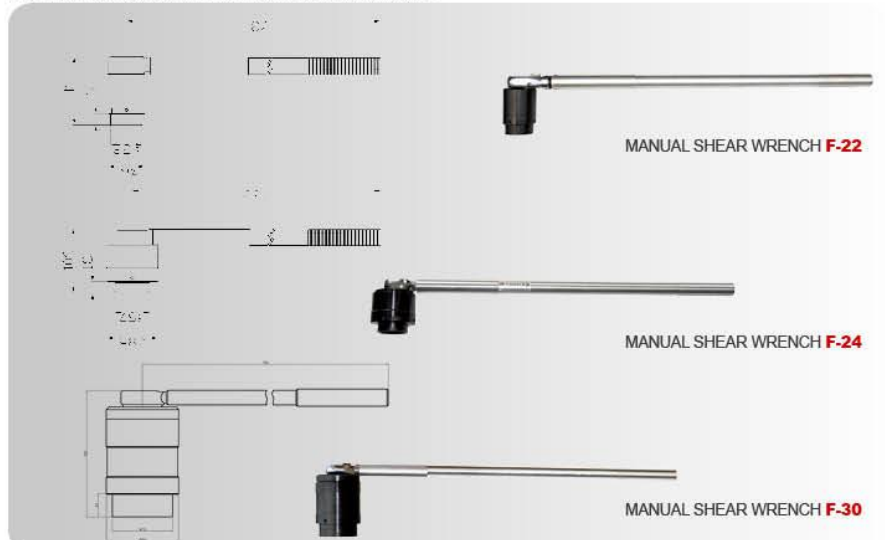

MANUAL SHEAR WRENCH **F-22**

MANUAL SHEAR WRENCH **F-24**

MANUAL SHEAR WRENCH **F-30**

| MODEL | MAX.TORQUE | WEIGHT | ADAPTABLE BOLTS DIA | | | |
|-------|------------|--------|---------------------|------|--------|--------|
| | | | S-10T | | A325 | |
| F-22 | 700N.m | 2.62KG | M12 M16 | 1/2" | 5/8" | |
| F-24 | 900N.m | 3.18KG | M20 M22 | 3/4" | 7/8" | |
| F-30 | 2100N.m | 4.62KG | M16 M20 | 5/8" | 3/4" | |
| | | | M22 M24 | 7/8" | 1" | |
| | | | M24 M27 M30 | 1" | 1-1/8" | 1-1/4" |

Each wrench provide 2 sockets,one of them will be set on the wrench.

>> > >>> WWW.HANPUTOOL.COM

ELECTRIC TORQUE WRENCH



171310



171309




171309

07


ELECTRIC TORQUE WRENCH Y SERIES

CHARACTERISTICS


Small volume, Light weight, Easy to control.
Adopt digital controller, accurate and reliable.



ELECTRIC TORQUE WRENCH Y SERIES **TN-3B**



ELECTRIC TORQUE WRENCH Y SERIES **TN-5B**



ELECTRIC TORQUE WRENCH Y SERIES **TN-9B**

| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | FREQUENCY | TORQUE RANGE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|-------|---------|--------------|-------------|-----------------------|-----------|--------------|------------------|--------------------|-------------------|---------------------|--------------|--------------|
| | | | | | | | | | | S-10T | A325 | A490 |
| TN-3B | 50-60Hz | 230V 115V | 8A 12A | 1300W | 50-60Hz | 100-300N.m | 24rpm | 4.4KG | Double Insulation | M12 M16 | 1/2" 5/8" | 1/2" |
| TN-5B | 50-60Hz | 230V 115V | 7A 14A | 1650W | 50-60Hz | 200-500N.m | 15.5rpm | 4.5KG | Double Insulation | M16 M20 | 5/8" 3/4" | 5/8" |
| TN-9B | 50-60Hz | 230V 115V | 7A 14A | 1650W | 50-60Hz | 400-900N.m | 9.5rpm | 5.3KG | Double Insulation | M20 M22 | 3/4" 7/8" | 3/4" 7/8" |

Each wrench provide 1 socket,it will be set on the wrench.


08

ELECTRIC TORQUE WRENCH Y SERIES


汉普 HANPU

CHARACTERISTICS


Small volume,light weight,Suitable for high altitude and narrow space work.
Digital control torque, high repeated accuracy and stability. Can control both torque value and rotational angle.
Torque and angle could be separately or simultaneously controlled.



ELECTRIC TORQUE WRENCH Y SERIES **TN-7LP**



ELECTRIC TORQUE WRENCH Y SERIES **TN-12LP**



ELECTRIC TORQUE WRENCH Y SERIES **TN-21LP**

| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | FREQUENCY | TORQUE RANGE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|---------|---------|--------------|-------------|-----------------------|-----------|--------------|------------------|--------------------|-------------------|---------------------|------------|------------|
| | | | | | | | | | | S-10T | A325 | A490 |
| TN-7LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 50-60Hz | 350-700N.m | 15rpm | 4.7KG | Double Insulation | M20 | 3/4" | 3/4" |
| TN-12LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 50-60Hz | 500-1200N.m | 9rpm | 5.5KG | Double Insulation | M22 M24 | 7/8" 1" | 7/8" 1" |
| TN-21LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 50-60Hz | 900-2100 N.m | 6rpm | 6.6KG | Double Insulation | M27 | 1-1/8" | 1-1/8" |


Each wrench provide 1 socket,it will be set on the wrench.




ELECTRIC TORQUE WRENCH Y SERIES




ELECTRIC TORQUE WRENCH L SERIES

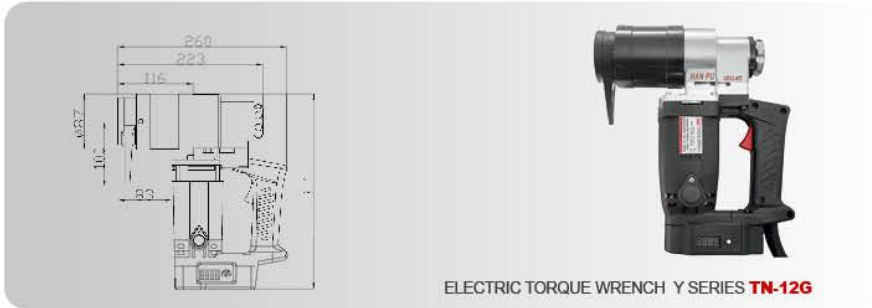

ELECTRIC TORQUE WRENCH Y SERIES **TN-12G**

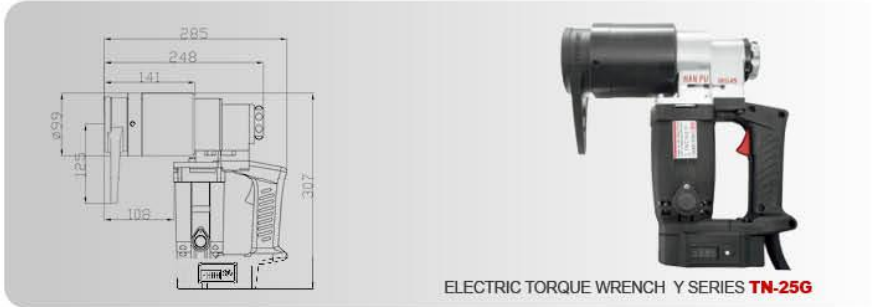

ELECTRIC TORQUE WRENCH Y SERIES **TN-25G**

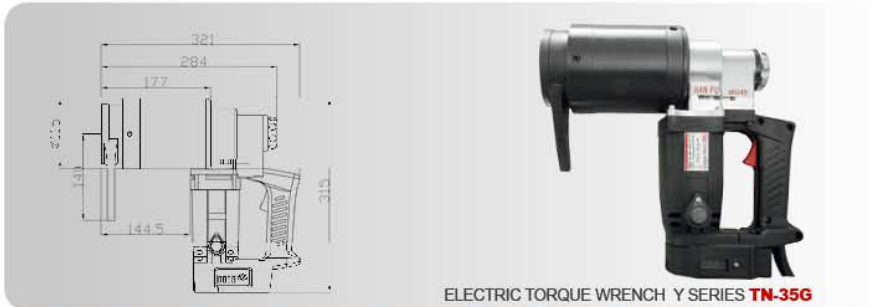

ELECTRIC TORQUE WRENCH Y SERIES **TN-35G**


| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | TORQUE RANGE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|--------|---------|--------------|-------------|-----------------------|--------------|------------------|--------------------|-------------------|---------------------|----------------------------|------------------|
| | | | | | | | | | S-10T | A325 | A490 |
| TN-12G | 50-60Hz | 230V 115V | 12A 24A | 2800W | 500-1200N.m | 10.5rpm | 7KG | Double Insulation | M22 M24 | 7/8" 1" | 7/8" 1" |
| TN-25G | 50-60Hz | 230V 115V | 12A 24A | 2800W | 1000-2500N.m | 5rpm | 8.5KG | Double Insulation | M27 M30 M33 | 1-1/8" 1-1/4" 1-3/8" | 1-1/8" 1-1/4" |
| TN-35G | 50-60Hz | 230V 115V | 12A 24A | 2800W | 1700-3500N.m | 2.5rpm | 12KG | Double Insulation | M30 M33 M36 | 1-1/4" 1-3/8" 1-1/2" | 1-1/4" 1-3/8" |

Each wrench provide 1 socket,it will be set on the wrench.


>> > >> WWW.HANPUTOOL.COM

CHARACTERISTICS


Small volume, Light weight, Easy to control.
Adopt digital controller, accurate and reliable.



ELECTRIC TORQUE WRENCH L SERIES **TL-3B**



ELECTRIC TORQUE WRENCH L SERIES **TL-5B**



ELECTRIC TORQUE WRENCH L SERIES **TL-9B**

| MODEL | FREQ | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | TORQUE RANGE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | SQUARE DRIVE | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|-------|---------|--------------|-------------|-----------------------|--------------|------------------|--------------------|------------------------|-------------------|---------------------|--------------|--------------|
| | | | | | | | | | | S-10T | A325 | A490 |
| TL-3B | 50-60Hz | 230V 115V | 6A 12A | 1300W | 100-300N.m | 24rpm | 4.4KG | 19x19mm (3/4"x3/4") | Double Insulation | M12 M16 | 1/2" 5/8" | 1/2" |
| TL-5B | 50-60Hz | 230V 115V | 7A 14A | 1650W | 200-500N.m | 15.5rpm | 4.5KG | 19x19mm (3/4"x3/4") | Double Insulation | M16 M20 | 5/8" 3/4" | 5/8" |
| TL-9B | 50-60Hz | 230V 115V | 7A 14A | 1650W | 400-900N.m | 9.5rpm | 5.3KG | 25.4x25.4mm (1"x1") | Double Insulation | M20 M22 | 3/4" 7/8" | 3/4" 7/8" |

wrench without socket


ELECTRIC TORQUE WRENCH L SERIES

ELECTRIC TORQUE WRENCH L SERIES




CHARACTERISTICS


Small volume, light weight, Suitable for high altitude and narrow space work. Digital control torque, high repeated accuracy and stability. Can control both torque value and rotational angle. Torque and angle can be separately control, also can be controlled at the same time.



ELECTRIC TORQUE WRENCH L SERIES **TL-7LP**




ELECTRIC TORQUE WRENCH L SERIES **TL-12LP**




ELECTRIC TORQUE WRENCH L SERIES **TL-21LP**

| MODEL | FREQ. | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | TORQUE RANGE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | SQUARE DRIVE | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|---------|---------|--------------|-------------|-----------------------|--------------|------------------|--------------------|---------------------|-------------------|---------------------|------------------|------------------|
| | | | | | | | | | | S-10T | A325 | A490 |
| TL-7LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 350-700N.m | 15rpm | 4.7KG | 25.4x25.4mm (1"x1") | Double Insulation | M20 M22 | 3/4" 7/8" | 3/4" |
| TL-12LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 500-1200N.m | 9rpm | 5.5KG | 25.4x25.4mm (1"x1") | Double Insulation | M22 M24 | 7/8" 1" | 7/8" 1" |
| TL-21LP | 50-60Hz | 230V 115V | 8A 16A | 1800W | 900-2100N.m | 6rpm | 6.8KG | 25.4x25.4mm (1"x1") | Double Insulation | M27 M30 | 1-1/8" 1-1/4" | 1-1/8" 1-1/4" |


wrench without socket

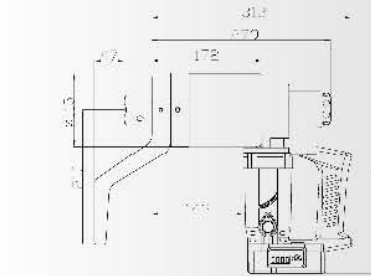

ELECTRIC TORQUE WRENCH L SERIES **TL-35G**

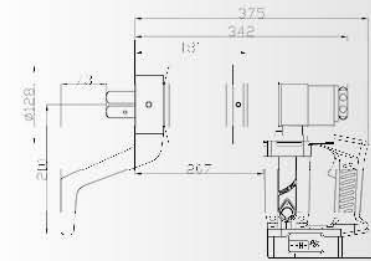

ELECTRIC TORQUE WRENCH L SERIES **TL-60G**

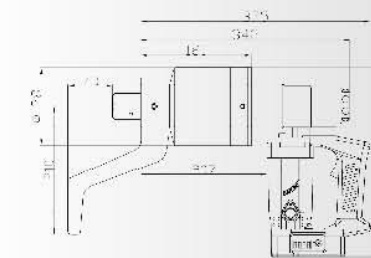

ELECTRIC TORQUE WRENCH L SERIES **TL-100G**

| MODEL | FREQ. | VOLTAGE | MAX CURRENT | MAX POWER CONSUMPTION | TORQUE RANGE | RO SPEED (min-1) | WEIGHT (MAIN BODY) | SQUARE DRIVE | PROTECT CLASS | ADAPTABLE BOLTS DIA | | |
|---------|---------|--------------|-------------|-----------------------|---------------|------------------|--------------------|-------------------------|-------------------|---------------------|----------------------------|------------------|
| | | | | | | | | | | S-10T | A325 | A490 |
| TL-35G | 50-60Hz | 230V 115V | 12A 24A | 2800W | 1700-3500N.m | 2.5rpm | 12KG | 38x38mm (1-1/2"x1-1/2") | Double Insulation | M30 M33 M36 | 1-1/4" 1-3/8" 1-1/2" | 1-1/4" 1-3/8" |
| TL-60G | 50-60Hz | 230V 115V | 12A 24A | 2800W | 2000-6000N.m | 0.8rpm | 18.5KG | 38x38mm (1-1/2"x1-1/2") | Double Insulation | M42 M45 M48 | 1-5/8" 1-3/4" 2" | 1-5/8" 1-3/4" |
| TL-100G | 50-60Hz | 230V 115V | 12A 24A | 2800W | 5000-10000N.m | 0.3rpm | 21KG | 38x38mm (1-1/2"x1-1/2") | Double Insulation | M48 M52 M56 | 2" 2-1/8" 2-1/4" | 2" 2-1/8" |

wrench without socket

13

ELECTRIC TENSION AND TORQUE CALIBRATOR

CHARACTERISTICS

Electric measurement, high accuracy, not influenced by temperature.
Light weight, portable, convenient for project test.



| MODEL | TORQUE RANGE | TENSION RANGE | CA. | WEIGHT (MAIN BODY) | ADAPTABLE BOLTS DIA |
|-------|--------------|---------------|-----|--------------------|--|
| PN-53 | 50-3000N.m | 0-500KN | ±2% | 28KG | M16(5/8") M20(3/4") M22(7/8") M24(1") M27(1-1/8") M30(1-1/4") |
| PN-85 | 50-5000N.m | 0-800KN | ±2% | 28KG | M16(5/8") M20(3/4") M22(7/8") M24(1") M27(1-1/8") M30(1-1/4") M33(1-3/8") M36(1-1/2") |

Each machine provide 2 size accessories.

14

PRESET MANUAL TORQUE WRENCH



| MODEL | MOMENT SCOPE | SIDE LENON SIZE | EXTERIOR(LXWxH) SIZE | WEIGHT | DIVISION VALUE |
|--------|--------------|------------------------|---|------------|----------------|
| T300N | 60-300N.m | 12.7x12.7mm 19x19mm | 635x48x48mm | 2.165KG | 7.5N.m/scale |
| T500N | 100-500N.m | 19x19mm | 685x48x52mm | 2.25KG | 10N.m/scale |
| T760N | 280-760N.m | 19x19mm | 835x55x58mm | 4.19KG | 10N.m/scale |
| T1000N | 200-1000N.m | 19x19mm 25.4x25.4mm | 900x58x58mm (Lenghened Handle 570mm,Total 1340mm) | 4.4+1.66KG | 12.5N.m/scale |
| T2000N | 750-2000N.m | 25.4x25.4mm | 1010x69x68mm (Lenghened Handle 870mm,Total 1750mm) | 6.81+3KG | 25N.m/scale |
| T3000N | 1000-3000N.m | 25.4x25.4mm | 1400x84x76mm (Lenghened Handle1000mm,Total 2140mm) | 14.6+6.1KG | 25N.m/scale |

ELECTRIC TENSION CALIBRATOR



| MODEL | TENSION RANGE | CA. | WEIGHT (MAIN BODY) | ADAPTABLE BOLTS DIA |
|---------|---------------|-----|--------------------|--|
| BTC-550 | 0-550KN | ±2% | 17KG | M16(5/8") M20(3/4") M22(7/8") M24(1") M27(1-1/8") M30(1-1/4") |
| BTC-800 | 0-800KN | ±2% | 18KG | M16(5/8") M20(3/4") M22(7/8") M24(1") M27(1-1/8") M30(1-1/4") M33(1-3/8") M36(1-1/2") |

Each machine provide 2 size accessories.

DIGITAL MANUAL TORQUE WRENCH



| MODEL | MOMENT SCOPE | SIDE LENON SIZE | EXTERIOR(LxWxH) SIZE | Ca | WEIGHT | DIVISION VALUE |
|--------|--------------|-----------------|----------------------|-----|--------|----------------|
| DF30 | 3-30N.m | 8.5x9.5mm | 355x42.5x39mm | ±1% | 0.40KG | 0.1N.m |
| DF100 | 10-100N.m | 12.7x12.7mm | 405x42.5x39mm | ±1% | 1.05KG | 0.1N.m |
| DF300 | 30-300N.m | 12.7x12.7mm | 590x48x47.5mm | ±1% | 1.83KG | 0.1N.m |
| DF500 | 50-500N.m | 19x19mm | 800x48x55mm | ±1% | 2.05KG | 0.1N.m |
| DF1000 | 100-1000N.m | 19x19mm | 1200x58x60mm | ±1% | 4.50KG | 1N.m |
| DF2000 | 200-2000N.m | 25.4x25.4mm | 2000x68x68mm | ±1% | 7KG | 1N.m |

Thanks for watching

Contact:



SHANDONG HANPU MACHINERY

Room 1812, Building A, Wanda Plaza, No 9, Jingsi Road,
Jinan City, Shandong Prov. China

+86.0531.83530737 office

+86.0531.83530747 fax

Kevin . Wong

+86.15253174416 cell

Email: hanputool01@yahoo.com / kevinwong90@aliyun.com