
Peerless® Handcuff Company

HANDCUFFS / LEG IRONS / WAIST CHAINS

ESTABLISHED 1914

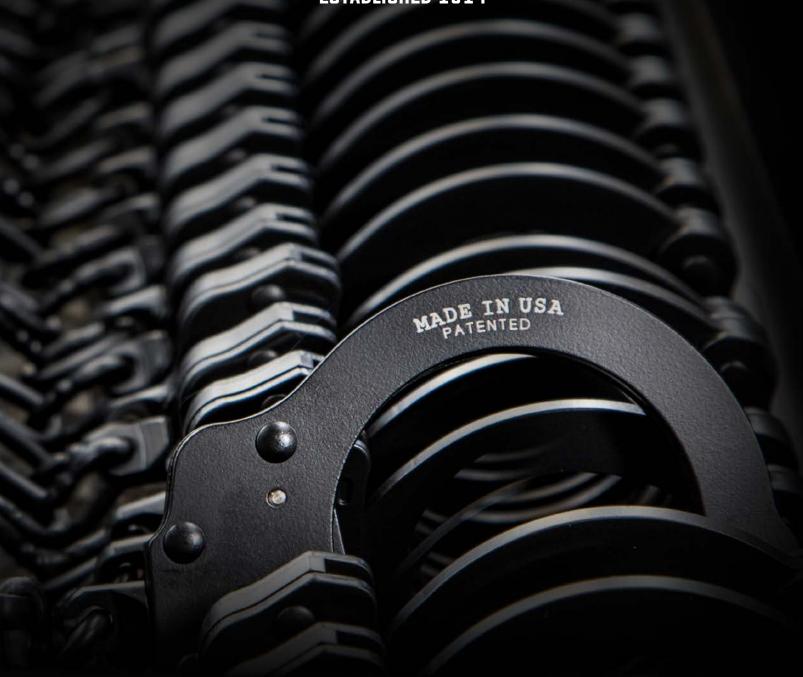

WWW.PEERLESS.NET

Chain Link Handcuff

Double Locking • Two Keys Supplied • Made in USA

Model 700C, 701C & 750C - Chain Link

Incorporates spun rivet construction, push pin double lock capability and nickel finish. Model 700C is NIJ 0307.01 certified.





Model 702C & 752C - Oversize Chain Link

Designed specifically for larger individuals or special security applications. This oversized cuff has a 20% larger inside perimeter than our standard Chain Link.





Hinged Handcuff

Double Locking • Two Keys Supplied • Made in USA

Model 801C, 802C & 850C

The hinged design provides additional restraint by more effectively restricting hand and arm movement. These models incorporate spun rivet construction and push pin double lock capability. Model 801C is NIJ 0307.01 certified.

Peerless® C Series products feature an improved **internal lock mechanism** for increased **tamper resistance**, smoother **ratcheting action** and greater **durability**. Designed to meet or exceed NLETC–NIJ–Metallic Handcuff Standard 0307.01.





Leg Iron

Double Locking • Two Keys Supplied • Made in USA

Model 703C & 753C - Leg Iron

Standard size Leg Irons feature all steel construction, spun rivets, 21 locking positions and push pin double lock capability. The 15" chain effectively limits range of motion.

Model 705C & 755C - Oversize Leg Iron

Designed specifically for larger individuals. They have a 3.2" opening with a maximum inside perimeter 20% larger than our standard Leg Iron. Features include all steel construction, spun rivets, 25 locking positions and push pin double lock capability. The 15" chain effectively limits range of motion.



Peerless® C Series products feature an improved **internal lock mechanism** for increased **tamper resistance**, smoother **ratcheting action** and greater **durability**. Leg Irons meet or exceed the NIJ standards for workmanship, mechanical strength, tamper resistance and corrosion resistance.



Waist Chain

Double Locking • Two Keys Supplied • Made in USA

Model 7002C Waist Chain - Separated Cuffs / 54" Chain

Designed for special security situations. Waist Chain has one NIJ approved Model 700C handcuff positioned at each hip allowing for either parallel arm or cross arm handcuffing. The special 54" heat treated steel chain includes padlock rings for waist size adjustments.

Model 7002C-XL Waist Chain - Separated Cuffs / 72" Chain

Same design as the Model 7002C with added chain (72") for larger waist size adjustments.

Model 7002C-OS Waist Chain - Separated OS Cuffs / 54" Chain

Same design as the Model 7002C with oversize handcuffs positioned at each hip.

Model 7003C Waist Chain - Linked Cuffs / 54" Chain

Designed for special security situations. Waist Chain has one NIJ approved Model 700C handcuff positioned at the navel allowing for limited use of the hands. The special 54" heat treated steel chain includes padlock rings for waist size adjustments.

Security Chain - PSC60 & PSC78

Designed for corrections, transport and courtroom situations. When used in conjunction with a set of handcuffs, this simple chain quickly converts into a secure waist restraint. The specially designed end link is compatible with all commonly used handcuffs - Chain Link or Hinged. The end link can also be slotted into any link on the chain and will fit "Black" and "Blue" style security boxes. Available in 60" and 78" length.



High Security Restraints


Non Standard Key • Deadbolt Lock • Made in USA

Designed for high risk prisoner restraint and transport situations. These products do not operate with a standard handcuff key. The restraints incorporate standard product with a MEDECO® or ASSA® Desmo high security lock system and aluminum housing. Both MEDECO® and ASSA® Desmo use restricted key control systems to prevent unauthorized key duplication. Multiple sets can be ordered with the same key code or different key codes.

Now available with the new Dead Bolt Security option. Dead Bolt Security complements the standard lock with an additional locking position for added security. When engaged, the Dead Bolt feature helps to secure the double lock against brute force and finessed picking and shimming attacks. The Dead Bolt option is only available with new or existing MEDECO® style key plans.

High security locks are available as chain link handcuff, leg iron and waist chain. Other features include improved internal lock mechanism, spun rivet construction and double lock capability.

MEDECO® is a registered trademark of Medeco High Security Locks. ASSA® Desmo is a registered trademark of Abloy Security, Inc.

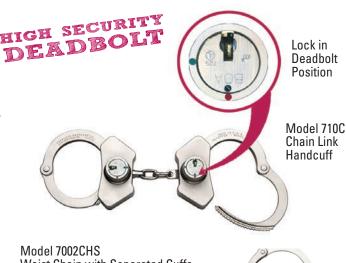




Peerless® works with you to provide exactly the products you need.

Special Situation Restraints and Custom Chain Work

Peerless® offers restraints for special situations and custom chain work to meet specific requirements. These products are variations of standard models or use component parts from standard models in different configurations to create the right tool for the job. Custom restraints may be available with the high security lock option. Call 800-732-3705 to discuss how your special restraint needs can be met.

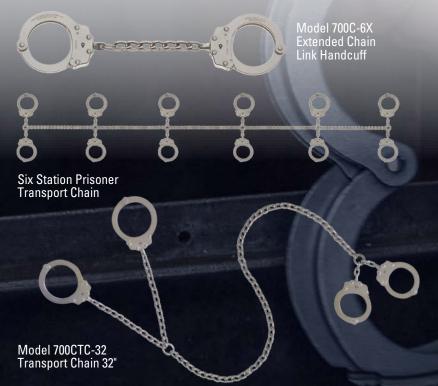



Keys

Oversize Handcuff Key (Pocket Clip)

Standard Handcuff Key

Standard size handcuff keys. Small and light weight. Compatible with most standard type handcuff locking mechanisms.

Oversize Handcuff Key

A high quality extra large key designed to make double locking and unlocking restraints faster and easier. The extra long aluminum barrel is oversized and knurled for easy handling. The flag tip and double lock pin are made from heat treated alloy steel for high strength and durability. Compatible with all standard type handcuff locking mechanisms. Offered in key ring and pocket clip styles. Available in silver or black finish.

Model 730C Superlite Chain Link Handcuff

Weighing in at just 5.2 ounces the Model 730 is near half the weight of a typical standard chain link handcuff. The Superlite is designed to meet the demands of law enforcement professionals while making the job a little easier.

The Model 730's major components utilize aerospace grade aluminum, carbon steel and stainless steel. It also features steel swivels, steel chain links and spun rivet construction. The smooth single-strand action has 21 locking positions with a push pin double lock. Available in either gray or black ceramic finish.

- The Model 730C Superlite is National Institute of Justice Standard 0307.01 certified.
- The Model 730C comes with a lifetime warranty for manufacturer defect.
- Made in USA





All Peerless® products are backed by our **lifetime guarantee** for manufacture defects, assuring you of the highest quality material and workmanship. When you want restraint devices that you can depend on, you want Peerless®. **Peerless® Handcuff Company** was established in 1914 by James Milton Gill in Springfield, Massachusetts. 2014 marked our 100th anniversary. Now in our fourth generation Peerless® continues as family business committed to producing the finest restraints available. Throughout our long history Peerless® has been headquartered in the Springfield area and our signature restraint products are still proudly made in the USA.

Peerless® Handcuff Company offers a full range of metallic restraint products and accessories. These products are used by law enforcement, correction and military agencies throughout the US and abroad. The classic swing through design of the original Peerless® handcuff continues to be an industry standard.

Please call or email with any questions concerning our products. Information is also available through our website.



Peerless® Handcuff Company 800-732-3705 / INFO@PEERLESS.NET / PEERLESS.NET

CHAIN	LINK HANDCU	JFF								
Model	Material	Finish	Weight	Max. Overall Length	Max. Length between Cuffs	Max. Diam. (First Tooth)	Min. Opening	Max. Internal Circumference	Min. Internal Circumference	Min. Diam. (Last Tooth)
700C	Carbon Steel	Nickel	10 oz / 283 gms	8.9 in / 227 mm	2.0 in / 51 mm	3.0 in / 76 mm	2.0 in / 51 mm	8.3 in / 211 mm	5.9 in / 150 mm	1.9 in / 48 mm
701C	Carbon Steel	Black Oxide	10 oz / 283 gms	8.9 in / 227 mm	2.0 in / 51 mm	3.0 in / 76 mm	2.0 in / 51 mm	8.3 in / 211 mm	5.9 in / 150 mm	1.9 in / 48 mm
730CS	Alum./Steel C	Ceramic/Gray	5.2 oz / 141gms	8.9 in / 227 mm	2.0 in / 51 mm	3.0 in / 76 mm	2.0 in / 51 mm	8.3 in / 211 mm	5.9 in / 150 mm	1.9 in / 48 mm
730CB	Alum./Steel C	eramic/Black	5.2 oz / 141gms	8.9 in / 227 mm	2.0 in / 51 mm	3.0 in / 76 mm	2.0 in / 51 mm	8.3 in / 211 mm	5.9 in / 150 mm	1.9 in / 48 mm
750C	Carbon Steel	Color Plated	10 oz / 283 gms	8.9 in / 227 mm	2.0 in / 51 mm	3.0 in / 76 mm	2.0 in / 51 mm	8.3 in / 211 mm	5.9 in / 150 mm	1.9 in / 48 mm
Oversize	e Chain Link Ha	ndcuff								
702C	Carbon Steel	Nickel	12 oz / 340 gms	10.5 in / 266 mm	2.0 in / 51 mm	3.5 in / 90 mm	2.75 in / 70 mm	10 in / 254 mm	7.5 in / 191 mm	2.4 in / 60 mm
752C	Carbon Steel	Color Plated	12 oz / 340 gms	10.5 in / 266 mm	2.0 in / 51 mm	3.5 in / 90 mm	2.75 in / 70 mm	10 in / 254 mm	7.5 in / 191 mm	2.4 in / 60 mm
HINGEI Model	D HANDCUFF Material	Finish	Weight	Max. Overall Length	Max. Length between Cuffs	Max. Diam. (First Tooth)	Min. Opening	Max. Internal Circumference	Min. Internal Circumference	Min. Diam. (Last Tooth)
801C	Carbon Steel	Nickel	12 oz / 340 gms	8.6 in / 218 mm	.43 in / 11 mm	3.23 in / 82 mm	2.2 in / 56 mm	9.1 in / 231 mm	6.4 in / 163 mm	1.9 in / 48 mm
802C	Carbon Steel I	Black Oxide	12 oz / 340 gms	8.6 in / 218 mm	.43 in / 11 mm	3.23 in / 82 mm	2.2 in / 56 mm	9.1 in / 231 mm	6.4 in / 163 mm	1.9 in / 48 mm
850C	Carbon Steel (Color Plated	12 oz / 340 gms	8.6 in / 218 mm	.43 in / 11 mm	3.23 in / 82 mm	2.2 in / 56 mm	9.1 in / 231 mm	6.4 in / 163 mm	1.9 in / 48 mm
LEG IRC	ON			Max. Overall	Max. Length	Max. Diam.	Min.	Max. Internal	Min. Internal	Min. Diam.
Model	Material	Finish	Weight	Length	between Cuffs	(First Tooth)	Opening	Circumference	Circumference	(Last Tooth)
703C	Carbon Steel	Nickel	16 oz / 454 gms	24.25 in / 616 mm	16.0 in / 406 mm	3.5 in / 90 mm	2.75 in / 70 mm	10.25 in / 260 mm	7.75 in / 197 mm	2.4 in / 60 mm
753C		Color Plated	16 oz / 454 gms	24.25 in / 616 mm	16.0 in / 406 mm	3.5 in / 90 mm	2.75 in / 70 mm	10.25 in / 260 mm	7.75 in / 197 mm	2.4 in / 60 mm
Oversize	e Leg Iron									
705C	Carbon Steel	Nickel	21 oz / 595 gms	25.5 in / 648 mm	15.5 in / 394 mm	4.4 in / 112 mm	3.2 in / 81 mm	12.25 in / 311 mm	9.25 in / 235 mm	2.9 in / 73 mm
755C	Carbon Steel	Color Plated	21 oz / 595 gms	25.5 in / 648 mm	15.5 in / 394 mm	4.4 in / 112 mm	3.2 in / 81 mm	12.25 in / 311 mm	9.25 in / 235 mm	2.9 in / 73 mm
WAIST	CHAIN			May Overell	May Janeth	Max. Diam.	Min	Max. Internal	Min Internal	Min Diam
Model	Material	Finish	Weight	Max. Overall Length	Max. Length between Cuffs	(First Tooth)	Min. Opening	Circumference	Min. Internal Circumference	Min. Diam. (Last Tooth)
			20 oz / 922 amo	nlo	HWIND	0.0:- /70	2.0 in / 51 mm	0.0: 1.014	E 0 in / 1E0 mm	
7002C	Carbon Steel	Nickel	29 oz / 822 gms	n/a	n/a	3.0 in / 76 mm	2.0 111/ 01 11111	8.3 in / 211 mm	5.9 in / 150 mm	1.9 in / 48 mm
7002C 7002C-XL	Carbon Steel Carbon Steel	Nickel Nickel	31 oz / 878 gms	n/a	n/a n/a	3.0 in / 76 mm 3.0 in / 76 mm	2.0 in / 51 mm	8.3 in / 211 mm 8.3 in / 211 mm	5.9 in / 150 mm	1.9 in / 48 mm 1.9 in / 48 mm
	Carbon Steel									
7002C-XL 7002C-OS	Carbon Steel	Nickel	31 oz / 878 gms	n/a	n/a	3.0 in / 76 mm	2.0 in / 51 mm	8.3 in / 211 mm	5.9 in / 150 mm	1.9 in / 48 mm
7002C-XL 7002C-OS 7003C	Carbon Steel Carbon Steel	Nickel Nickel	31 oz / 878 gms 33 oz / 935 gms	n/a n/a	n/a n/a	3.0 in / 76 mm 3.5 in / 90 mm	2.0 in / 51 mm 2.75 in / 70 mm	8.3 in / 211 mm 10 in / 254 mm	5.9 in / 150 mm 7.5 in / 191 mm	1.9 in / 48 mm 2.4 in / 60 mm
7002C-XL	Carbon Steel Carbon Steel Carbon Steel	Nickel Nickel Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms	n/a n/a n/a	n/a n/a 2.0 in / 51 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm
7002C-XL 7002C-0S 7003C PSC60 PSC78	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel	Nickel Nickel Nickel Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms	n/a n/a n/a 60 in / 1524 mm	n/a n/a 2.0 in / 51 mm n/a	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a
7002C-XL 7002C-0S 7003C PSC60 PSC78	Carbon Steel Carbon Steel Carbon Steel Carbon Steel	Nickel Nickel Nickel Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms	n/a n/a n/a 60 in / 1524 mm	n/a n/a 2.0 in / 51 mm n/a	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam.	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min.	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel	Nickel Nickel Nickel Nickel Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight	n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth)	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam.
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel	Nickel Nickel Nickel Nickel Nickel Tinish	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms	n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam.	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min.	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a Nin. Internal Circumference	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth)
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al	Nickel Nickel Nickel Nickel Finish lum Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight	n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal Circumference 5.9 in. / 150 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C 702CHS	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al	Nickel Nickel Nickel Nickel Sickel Nickel um Nickel um Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight 14 oz / 396 gms 16 oz / 454 gms	n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm 2.75 in / 70 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm 10 in / 254 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal Circumference 5.9 in / 150 mm 7.5 in / 191 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm 2.5 in / 65 mm
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C 702CHS 7002CHS	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al	Nickel Nickel Nickel Nickel Wickel Nickel Um Nickel Um Nickel Um Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight 14 oz / 396 gms 16 oz / 454 gms 19 oz / 539 gms 16 oz / 454 gms	n/a n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm 24.25 in / 616 mm	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm 2.0 in / 51 mm 16.0 in / 406 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm 3.5 in / 90 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm 2.75 in / 70 mm 2.75 in / 70 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm 10 in / 254 mm 10 in / 254 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal Circumference 5.9 in / 150 mm 7.5 in / 191 mm 7.5 in / 191 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm 2.5 in / 65 mm 2.4 in / 60 mm
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C 702CHS 703CHS 7002CHS	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al	Nickel Nickel Nickel Nickel Wickel Nickel Um Nickel Um Nickel Um Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight 14 oz / 396 gms 16 oz / 454 gms 19 oz / 539 gms	n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm 24.25 in / 616 mm 10.5 in / 266 mm n/a	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm 3.5 in / 90 mm 3.5 in / 90 mm 3.0 in / 76 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.0 in / 51 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm 10 in / 254 mm 10 in / 254 mm 10 in / 254 mm 8.3 in / 211 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal Circumference 5.9 in. / 150 mm 7.5 in / 191 mm 7.5 in / 191 mm 7.5 in. / 191 mm 5.9 in. / 150 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm 2.5 in / 65 mm 2.4 in / 60 mm 1.9 in / 48 mm 1.9 in / 48 mm
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C 702CHS 703CHS 7002CHS	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al	Nickel Nickel Nickel Nickel Wickel Nickel Um Nickel Um Nickel Um Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight 14 oz / 396 gms 16 oz / 454 gms 19 oz / 539 gms	n/a n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm 24.25 in / 616 mm 10.5 in / 266 mm	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm 2.0 in / 51 mm 16.0 in / 406 mm 2.0 in / 51 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm 3.5 in / 90 mm 3.5 in / 90 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.75 in / 70 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm 10 in / 254 mm 10 in / 254 mm 10 in / 254 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal Circumference 5.9 in. / 150 mm 7.5 in / 191 mm 7.5 in / 191 mm 7.5 in. / 191 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm 2.5 in / 65 mm 2.4 in / 60 mm 1.9 in / 48 mm
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C 702CHS 703CHS 7003CHS 7003CHS 8 SPECIA Model	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al	Nickel Nickel Nickel Nickel Wickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight 14 oz / 396 gms 16 oz / 454 gms 19 oz / 539 gms 16 oz / 454 gms 33 oz / 935 gms	n/a n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm 24.25 in / 616 mm 10.5 in / 266 mm n/a Max. Overall	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm 3.5 in / 90 mm 3.5 in / 90 mm 3.0 in / 76 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.0 in / 51 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm 10 in / 254 mm 10 in / 254 mm 10 in / 254 mm 8.3 in / 211 mm Max. Internal	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a Min. Internal Circumference 5.9 in. / 150 mm 7.5 in / 191 mm 7.5 in / 191 mm 5.9 in. / 150 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm 2.5 in / 65 mm 2.4 in / 60 mm 1.9 in / 48 mm 1.9 in / 48 mm
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C 702CHS 7002CHS 7003CHS 7003CHS SPECIA	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al Carbon Steel/Al Material	Nickel Nickel Nickel Nickel Finish um Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight 14 oz / 396 gms 16 oz / 454 gms 19 oz / 539 gms 16 oz / 454 gms 33 oz / 935 gms Weight 10.5 oz / 298 gms	n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm 24.25 in / 616 mm 10.5 in / 266 mm n/a Max. Overall Length with Chain	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm 406 mm 2.0 in / 51 mm Max. Length between Cuffs 5.3 in / 135 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm 3.5 in / 90 mm 3.5 in / 90 mm 3.0 in / 76 mm Max. Diam. (First Tooth)	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.0 in / 51 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm 10 in / 254 mm 10 in / 254 mm 10 in / 254 mm 8.3 in / 211 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal Circumference 5.9 in. / 150 mm 7.5 in / 191 mm 7.5 in. / 191 mm 7.5 in. / 191 mm 5.9 in. / 150 mm Min. Internal Circumference	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm 2.5 in / 65 mm 2.4 in / 60 mm 1.9 in / 48 mm 1.9 in / 48 mm Min. Diam. (Last Tooth)
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C 702CHS 703CHS 7003CHS SPECIA Model 700C-6X	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al Carbon Steel	Nickel Nickel Nickel Nickel Finish Um Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight 14 oz / 396 gms 16 oz / 454 gms 19 oz / 539 gms 16 oz / 454 gms 33 oz / 935 gms Weight 10.5 oz / 298 gms	n/a n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm 24.25 in / 616 mm 10.5 in / 266 mm n/a Max. Overall Length with Chain	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm 406 mm 2.0 in / 51 mm Max. Length between Cuffs 5.3 in / 135 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm 3.5 in / 90 mm 3.5 in / 90 mm 3.0 in / 76 mm Max. Diam. (First Tooth) 3.0 in / 76 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.0 in / 51 mm Min. Opening 2.0 in / 51 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm 10 in / 254 mm 10 in / 254 mm 10 in / 254 mm 8.3 in / 211 mm Max. Internal Circumference 8.3 in / 211 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal Circumference 5.9 in / 150 mm 7.5 in / 191 mm 7.5 in / 191 mm 7.5 in / 191 mm 5.9 in / 150 mm Min. Internal Circumference 5.9 in / 150 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm 2.5 in / 65 mm 2.5 in / 65 mm 1.9 in / 48 mm 1.9 in / 48 mm Min. Diam. (Last Tooth) 1.9 in / 48 mm
7002C-XL 7002C-OS 7003C PSC60 PSC78 HIGH S Model 710C 702CHS 703CHS 7002CHS 7003CHS SPECIA Model 700C-6X 702C-6X	Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel Carbon Steel ECURITY Material Carbon Steel/Al Carbon Steel	Nickel Nickel Nickel Nickel Finish Um Nickel Um Nickel	31 oz / 878 gms 33 oz / 935 gms 29 oz / 822 gms 20 oz / 566 gms 30 oz / 850 gms Weight 14 oz / 396 gms 16 oz / 454 gms 19 oz / 539 gms 16 oz / 454 gms 33 oz / 935 gms Weight 10.5 oz / 298 gms 14 oz / 396 gms	n/a n/a n/a n/a 60 in / 1524 mm 78 in / 1981 mm Max. Overall Length with Chain 8.9 in / 227 mm 10.5 in / 266 mm 24.25 in / 616 mm 10.5 in / 266 mm 10.5 in / 266 mm 10.5 in / 266 mm 10.5 in / 362 mm	n/a n/a 2.0 in / 51 mm n/a n/a Max. Length between Cuffs 2.0 in / 51 mm 406 mm 2.0 in / 51 mm Max. Length between Cuffs 5.3 in / 135 mm	3.0 in / 76 mm 3.5 in / 90 mm 3.0 in / 76 mm n/a n/a Max. Diam. (First Tooth) 3.0 in / 76 mm 3.6 in / 92 mm 3.5 in / 90 mm 3.5 in / 90 mm 3.0 in / 76 mm Max. Diam. (First Tooth) 3.0 in / 76 mm	2.0 in / 51 mm 2.75 in / 70 mm 2.0 in / 51 mm n/a n/a Min. Opening 2.0 in / 51 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.75 in / 70 mm 2.0 in / 51 mm Min. Opening 2.0 in / 51 mm	8.3 in / 211 mm 10 in / 254 mm 8.3 in / 211 mm n/a n/a Max. Internal Circumference 8.3 in / 211 mm 10 in / 254 mm 10 in / 254 mm 10 in / 254 mm 8.3 in / 211 mm Max. Internal Circumference 8.3 in / 211 mm	5.9 in / 150 mm 7.5 in / 191 mm 5.9 in / 150 mm n/a n/a Min. Internal Circumference 5.9 in / 150 mm 7.5 in / 191 mm 7.5 in / 191 mm 7.5 in / 191 mm 5.9 in / 150 mm Min. Internal Circumference 5.9 in / 150 mm	1.9 in / 48 mm 2.4 in / 60 mm 1.9 in / 48 mm n/a n/a Min. Diam. (Last Tooth) 1.9 in / 48 mm 2.5 in / 65 mm 2.5 in / 65 mm 1.9 in / 48 mm 1.9 in / 48 mm Min. Diam. (Last Tooth) 1.9 in / 48 mm